

RG-M32 3200M Wi-Fi 6 Dual-band Gigabit Mesh* Router

DATASHEET



/ Highlights

- Next-gen gigabit Wi-Fi 6 standard
- 4x4 Enterprise-level chipset, better stability under heavy load
- 4 Dual-band antennas and 8 signal amplifiers, provide whole-home network coverage
- Exclusive Reyee Mesh solution, one click to mesh up multiple Reyee Mesh devices
- Smart signal indicator, find the best spot to place a sub-router
- Take control of your home network at your fingertips


Highlight Features










Highlight Features

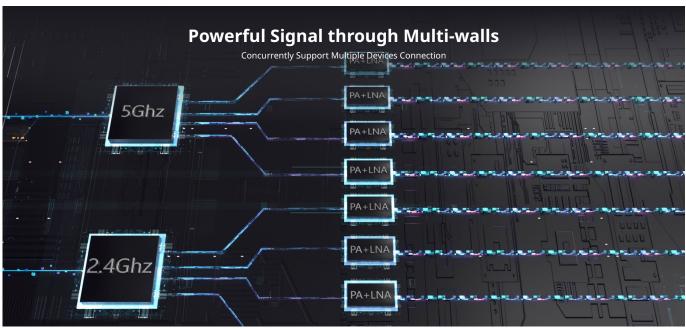

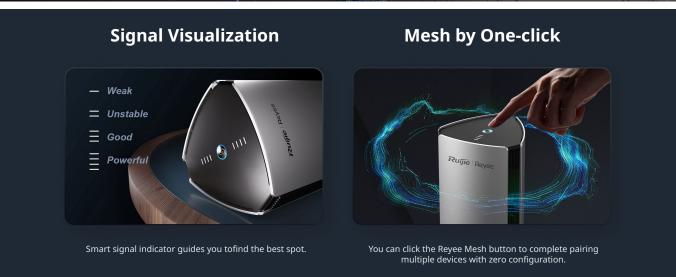

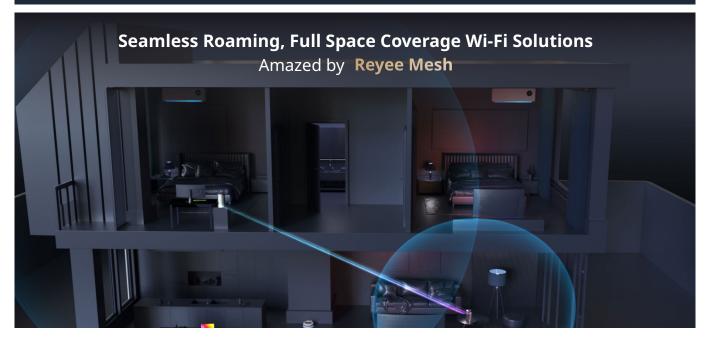

Highlight Features

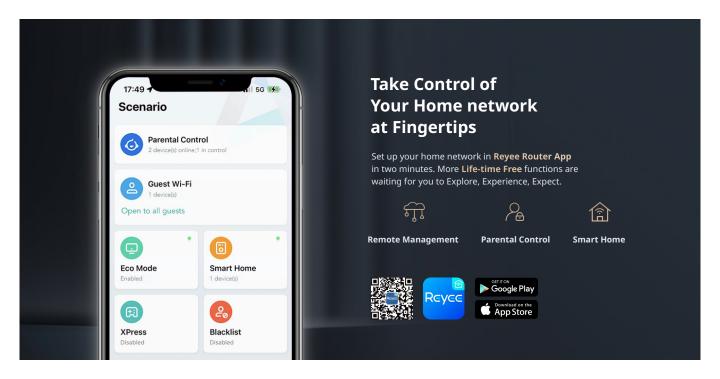

.

.



	Basic
Dimensions (W×D×H)	119 mm × 119 mm × 200 mm (4.7 in. × 5 in. × 7.9 in. antennas not included)
Weight	0.66 kg (packages not included)
Wi-Fi Standards	Wi-Fi 6 (802.11ax)
MIMO	2.4 GHz, 4×4, MU-MIMO 5 GHz, 4×4, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 800 Mbps 5 GHz: 2402 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80/MHz
Antennas	4 dual-band
Antennas Type	Internal Omnidirectional
Antenna Gain	2.4 GHz: 4 dBi 5 GHz: 4 dBi
WAN Port	1×10/100/1000 Base-T
LAN Ports	3×10/100/1000 Base-T
Recommended Users	60
Max. Users	192
Power Supply	DC 12V/2A
Power Consumption	< 30 W
Operation Frequency Bands	802.11b/g/n/ax: 2.400 GHz to 2.483 GHz 802.11a/n/ac: 5.150 GHz to 5.350 GHz 802.11a/n/ac/ax: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply
DFS	✓
Transmit Power	CE EIRP: ≤20dBm (2.4GHz) ≤27dBm (5GHz) ≤20dBm 2400~2483.5MHz(Bluetooth) 2400~2483.5MHz ≤ 20dBm(EIRP)

 $5150\sim5350 MHz \le 23 dBm(EIRP)$ $5470\sim5725 MHz \le 30 dBm(EIRP)$ $5725\sim5850 MHz \le 30 dBm(EIRP)$



	Basic		
Receive Sensitivity	2.4 GHz: 802.11b: -96 dBm(1 Mbps) 802.11g: -91 dBm(6 Mbps), -85 dBm(54 Mbps) 802.11n: -90dBm(MCS0), -85 dBm(MCS7) 5 GHz: 802.11n: -90 dBm(MCS0), -70 dBm(MCS7) 802.11a: -88 dBm(6 Mbps), -60 dBm(54 Mbps) 802.11ac: -82dBm(MCS0), -57dBm(MCS7), -52dBm(MCS9)		
Operating Temperature	-10 °C to +45 °C (14 °F to 113 °F)		
Operating Humidity	5% to 95% Noncondensing		
Certifications	CE, SIRIM, RCM RoHS		
	Wireless		
OFDMA	✓		
MU-MIMO	✓		
BSS Coloring	✓		
Maximum Number of SSIDs	6		
SSID Hiding	✓		
Band Steering	✓		
Guest Wi-Fi	✓		
WPA/WPA2	✓		
WPA3	-		
Roaming	Layer 3 Roaming		
Blacklist	✓		
Reyee Mesh	✓		
Mesh Pairing by Hardware	✓		
Mesh Pairing by Mesh Button	✓		
Mesh Pairing by Eweb	✓		

Specifications

	Wireless	
Recommended Hop Count	≤2	
Wi-Fi Optimization	✓	
QoS (WMM)	~	
WPS	-	
Transmission Power Adjustment	✓	
	Hardware	
CPU	MT7622B+MT7911AN+MT7915AN	
Flash	16 MB	
RAM/SDRAM	256 MB	
Color	Black	
System LED Indicator	✓	
Reyee Mesh LED Indicator	✓	
Reyee Mesh Button	✓	
Power Button	-	
Reset Button	✓	
DC Connector Dimensions	Outer Diameter: 5.5 mm Inner Diameter: 2.0 mm Length: 11.5 mm (Outer Diameter: 0.22 in. Inner Diameter: 0.07 in. Length: 0.39 in.)	
WAN		
Static IP	✓	
DHCP	✓	
PPPoE	✓	



WAN		
Learning PPPoE Account & Password	~	
VLAN Tagging	✓	
	LAN	
DHCP Server	~	
Client List	✓	
Static IP Assignment	✓	
Port-Based Flow Control	~	
	Features	
TR069	~	
IPv6	~	
DDNS	✓	
IPTV	~	
Alarm	✓	
Diagnosis	✓	
UPnP	✓	
ARP Binding	✓	
Port Mapping	✓	
DMZ Host	✓	
Rate Limitation of Terminals	✓	
Hardware Acceleration	✓	
MAC Address Cloning	✓	
Cloud Management	✓	
Repeater Mode	~	
WISP Mode	✓	



	Security	
PPTP VPN Server	~	
PPTP VPN Client	~	
L2TP VPN Client	-	
Parental Control	Time Schedule	
Protect TCP Flood Attacks	✓	
Protect ICMP Attacks		
Protect UDP Flood Attacks	-	
System		
Default Access/Password	192.168.110.1 No Password Required by Default	
URL Access	✓	
Local Upgrade	✓	
Online Upgrade	✓	
APP Upgrade	✓	
Syslog	✓	
Backup	✓	
Factory Reset	✓	
Language	Chinese English Vietnamese Indonesian Thai Arabic Traditional Chinese Spanish Russian	

Package Contents

Package Information	RG-M32
Wireless Router	1
Power Adapter	1
Quick Start Guide	1
Cat5E UTP Cable	1





Copyright ©2000-2024 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.
Website: https://reyee.ruijie.com/en-global